

## Antioxidant Masterbatch

High performance antioxidant master batch is used to Improve processability & Thermal Degradation during processing of polymers. D10-1062 is combo pack of Primary and secondary by 80:20 ratio.




### Key Characteristics

1. Prevents thermal degradation & provides thermal stability during processing
2. Inhibit Oxidation (Degradation)
3. Avoids Gel Formation
4. Prevents Yellowing of plastic articles.
5. Improves processability of reprocessed Granules
6. Increases OIT in HDPE Pipes

Product Code	Active Content	Base Polymer	Dosage
Additive D10-1062	10 %	PE	1-3 %

### Applications

- Mono And Multi Layer Films , HDPE Pipes And Drip Laterals, PLB Duct Pipes
- Roto Molding
- Blow Molding And Injection Molding
- Reprocess PE Resin.
- Green House Films And Mulch Films,

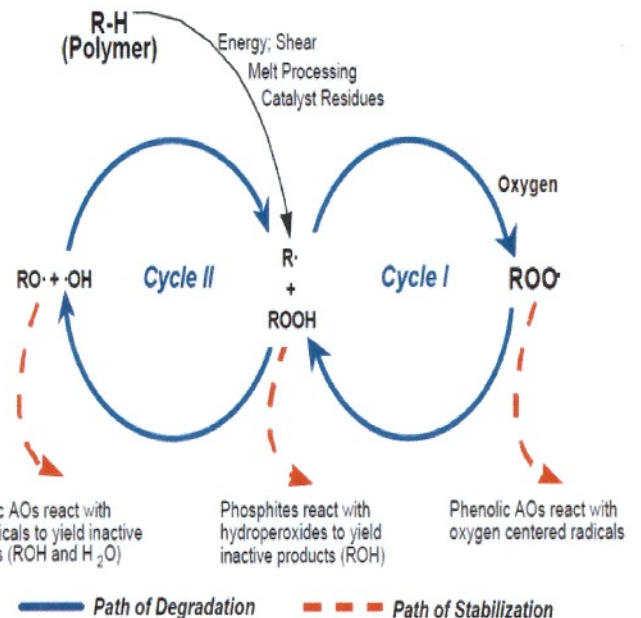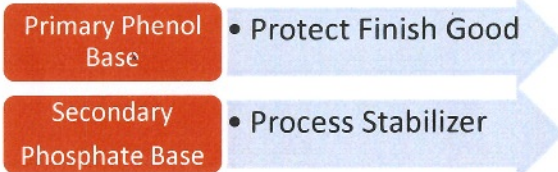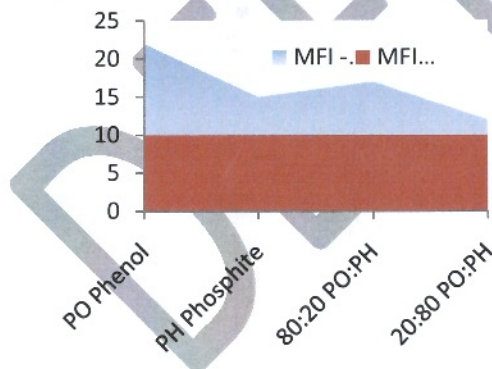

### Disclaimer:

All information is given in good faith. Above all data obtained under standard conditions with our testing facilities, may vary under different conditions. It is recommended to test the above properties to finalize the use of the product for specific and particular applications.